

SINGLE/DUAL DUCT TERMINALS

Single/Dual Duct Terminals | Single Duct | Description

ESV • Basic Unit with Controls

Models:

- PESV • Pneumatic
- EESV • Electric
- AESV • Analog Electronic
- DESV • Digital Electronic



- Standard AeroCross™ multi-point center averaging velocity sensor (except EESV).
- Standard dual density insulation.
- Standard 22-gauge casing with slip and drive discharge connection.
- Controls supplied by Titus are factory calibrated for a quicker start-up.



DESV

Q8

ESV SINGLE DUCT

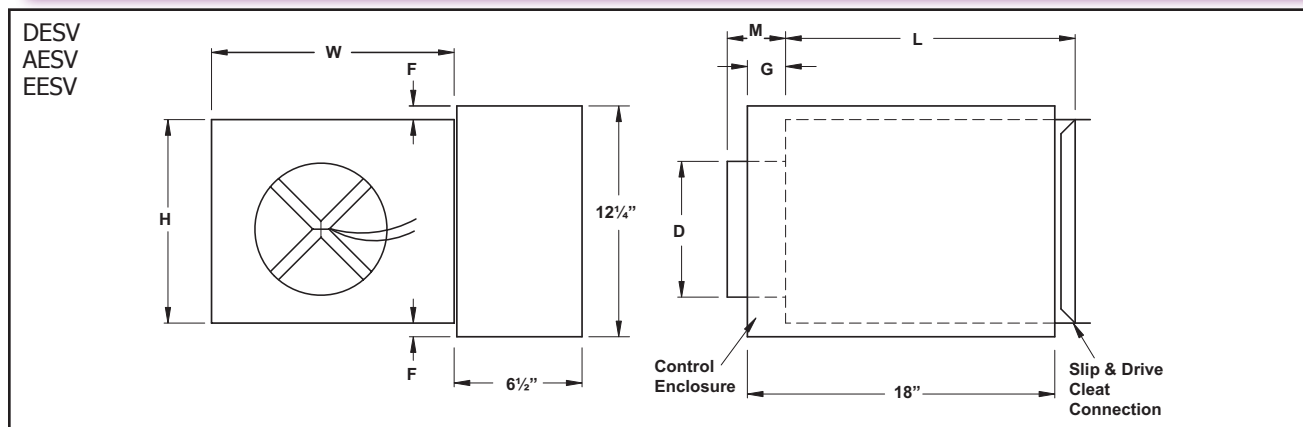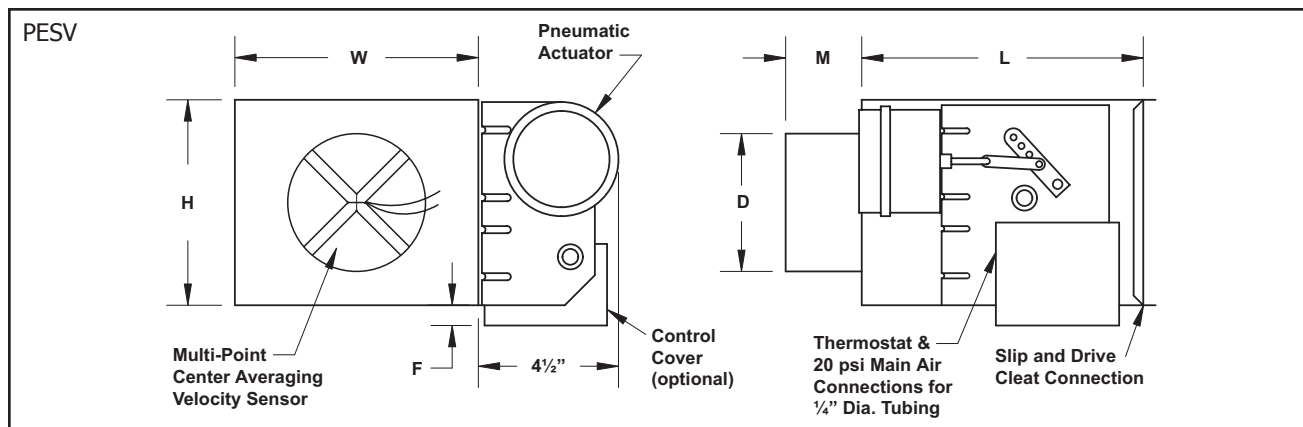

Inlet Size	cfm Range	D	F		G	H	L	M	W
			PESV	AESV DESV EESV					
4	0-225	3 ⁷ / ₈	1 ⁷ / ₈	2 ¹ / ₈	7 ³ / ₈	8	15 ¹ / ₂	5 ³ / ₈	12
5	0-350	4 ⁷ / ₈	1 ⁷ / ₈	2 ¹ / ₈	7 ³ / ₈	8	15 ¹ / ₂	5 ³ / ₈	12
6	0-500	5 ⁷ / ₈	1 ⁷ / ₈	2 ¹ / ₈	7 ³ / ₈	8	15 ¹ / ₂	3 ³ / ₈	12
7	0-650	6 ⁷ / ₈	7 ⁷ / ₈	1 ¹ / ₈	7 ³ / ₈	10	15 ¹ / ₂	3 ³ / ₈	12
8	0-900	7 ⁷ / ₈	7 ⁷ / ₈	1 ¹ / ₈	7 ³ / ₈	10	15 ¹ / ₂	3 ³ / ₈	12
9	0-1050	8 ⁷ / ₈	-	-	5 ³ / ₈	12 ¹ / ₂	15 ¹ / ₂	3 ³ / ₈	14
10	0-1400	9 ⁷ / ₈	-	-	5 ³ / ₈	12 ¹ / ₂	15 ¹ / ₂	3 ³ / ₈	14
12	0-2000	11 ⁷ / ₈	-	-	5 ³ / ₈	15	15 ¹ / ₂	3 ³ / ₈	16
14	0-3000	13 ⁷ / ₈	-	-	3 ³ / ₈	17 ¹ / ₂	15 ¹ / ₂	3 ³ / ₈	20
16	0-4000	15 ⁷ / ₈	-	-	3 ³ / ₈	18	15 ¹ / ₂	3 ³ / ₈	24
24x16	0-8000	23 ⁷ / ₈ - 15 ⁷ / ₈	7 ⁷ / ₈	1 ¹ / ₈	5 ³ / ₈	18	15	3 ³ / ₈	38

All dimensions are in inches.

